


STYLE 2644

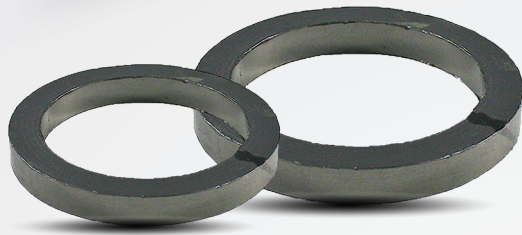

Ceramic Fiber Tape

Disclaimer:

The company's products are sold subject to the company's standard terms and conditions of sale products are warranted against defective materials & workmanship. The company makes every effort to ensure all the information, recommendations or the specifications provided by it are accurate and true. However as the company has no control over the conditions of it's use, it does not accept any liability, either directly or indirectly regarding the usage of its product.

Product Overview:

Description: These preformed graphite rings are designed for high-temperature applications requiring minimal leakage and exceptional thermal conductivity. They are ideal for use in high-pressure and high-temperature valves, compressors, and turbines.

Technical Specifications:

Specification	Test Result
Material:	Graphite
Temperature Range:	Up to 650°C
Pressure Resistance:	Up to 30 Mpa
pH Range:	0 - 14

Applications:

Valves, turbines, and high temperature equipment in power plants and petrochemical facilities.

Key Benefits:

- Excellent thermal conductivity.
- Handles extreme temperature and pressure conditions.